


Digital Timer with 3 Time Settings

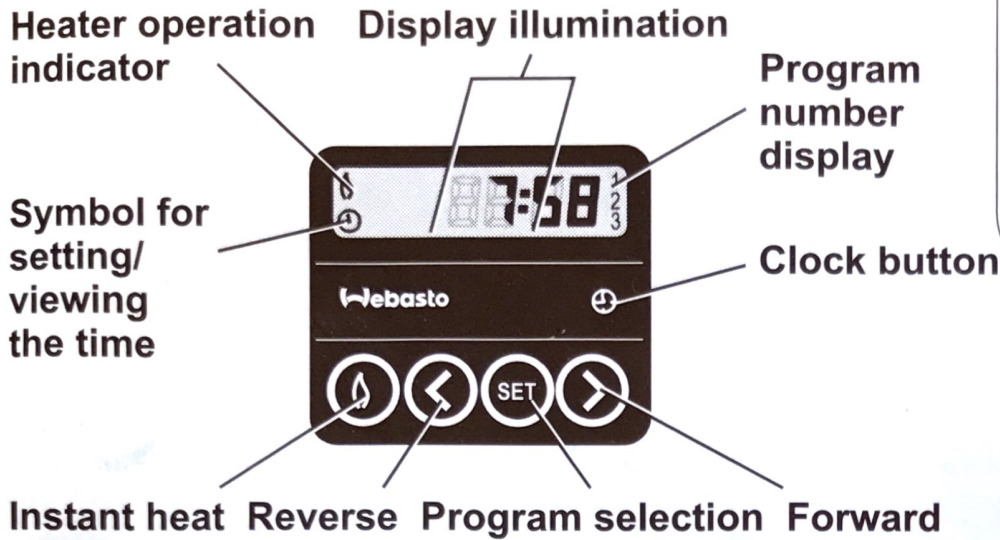

Note:
Be sure to take into account the switching from summer time to winter time (and vice versa).

General	The start of the heating operation can be precisely preset anywhere between "1 minute" up to "24 hours". Three starts may be programmed only one of which, however, can be activated. The maximum operating time is 60 minutes.
Switching the heater on	Manually: by pressing the "instant heating" button . Automatically: by programming the heater starting time The program number is shown on the display and the display is illuminated.
Switching the heater off	Manually: by pressing the "instant heating" button . Automatically: after the programmed operating time has elapsed The display field is no longer illuminated.
Setting the time of the day	Press the "Clock" button and subsequently "Forward" or "Reverse" .
Viewing the time	Press the "Clock" button
Programming heater starting time	Press the button Within 10 sec. press the "Forward" or "Reverse" button until the desired time for the start of the heating operation is shown on the display. If a different program number is required, press the button.
Erasing programmed times	Briefly press the button.
Selecting preset starting time	Press the button within 10 sec. periods until the program number associated with the desired preset time is displayed